

TECHNICAL DATA

HEATSCOPE Spot power heater


Voltage	230 V AC ~ – 50/60 Hz
Power	1600 W / 2200 W / 2800 W
Amperage	6.96 A / 9.57 A / 12.17 A
Cable	1.1 m / 3 x 1.5 mm ² oder 1.1 m / 4 x 1.5 mm ²
Temperature surface	400 °C
Temperature housing	max. 150 °C
Filament temperature	1200-1300 °C
Colour temperature	1550-1650 K
max. power in	ca. 10 sec.
Visible light	< 600 Lux
recommended installation height	min. 1.8 m / max. 3 m
IP safety class	IP 24 (well covered or with optional weather shield)
Control	manually/external: ON/OFF + 100%, 50% or: via IR-Remote Control ON/OFF + 100%, 50%



TECHNICAL DATA

HEATSCOPE Vision ambient heater

Voltage	230 VAC ~ – 50/60 Hz
Power	1600 W / 2200 W / 3200 W
Amperage	6.96 A / 9.57 A / 13.91 A
Cable	1.1 m / 3 x 1.5 mm ² oder 1.1 m / 4 x 1.5 mm ²
Temperature surface	300 °C
Temperature housing	max. 130 °C
Filament temperature	1200-1300 °C
Colour temperature	1550-1650 K
max. power in	ca. 30 sec.
Visible light	< 300 Lux
recommended installation height	min. 1.8 m / max. 2.5 m
IP safety class	IP 44 (well covered or with optional weather shield)
Control	manually/external: ON/OFF + 100%, 50% or: via IR-Remote Control ON/OFF + 100%, 50%

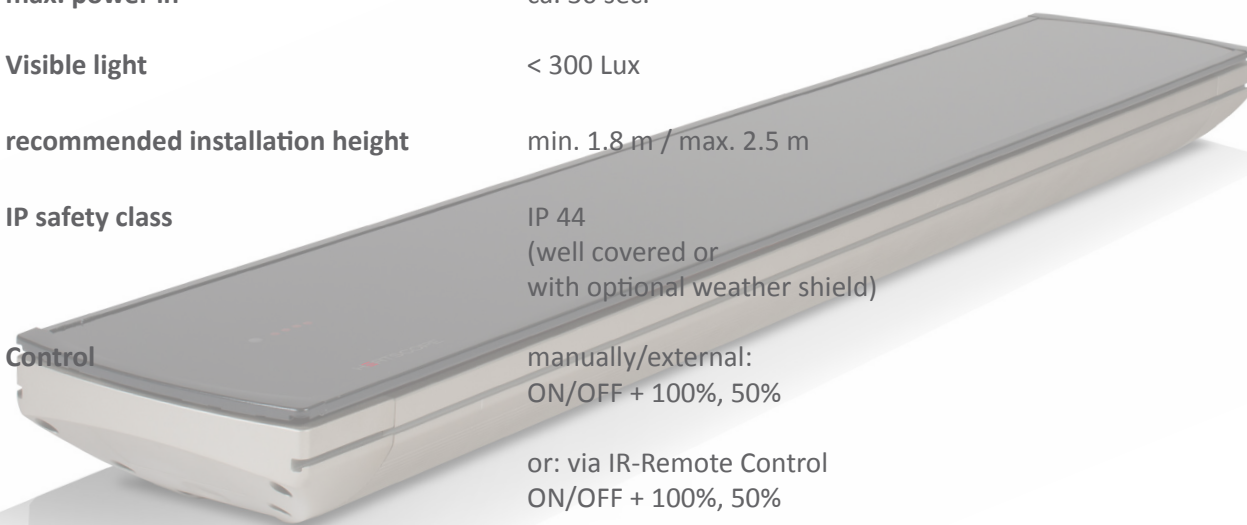

TECHNICAL DATA

HEATSCOPE FREE design stand

FREE	Voltage	Connection
3.5 – 4 – 5	230 V AC ~ – 50/60 Hz	delivery with open cable

FREE	Component	Color
3.5 – 4 – 5	Foot ¹ :	white, black
3.5 – 4 – 5	Head ² :	white, black
3.5 – 4 – 5	Weather shield ³ :	white, black
3.5 – 4 – 5	Pole ⁴ :	white, black, wooden design

FREE	corresp. model	Measurements & Weight
3.5	MHS-SP2200	ø 61 cm x 216,3 cm x 98 cm 38,7 kg + 4,5 kg (SPOT)
3.5	MHS-SP2800	ø 61 cm x 216,3 cm x 98 cm 38,7 kg + 5,0 kg (SPOT)
3.5	MHS-VT1600	ø 61 cm x 216,3 cm x 98 cm 38,7 kg + 6,0 kg (VISION)
4	MHS-VT2200	ø 61 cm x 216,3 cm x 124 cm 39,3 kg + 8,0 kg (VISION)
5	MHS-VT3200	ø 61 cm x 216,3 cm x 175 cm 40,4 kg + 11,0 kg (VISION)

¹ Foot is made of galvanized steel in black or white.





² Head is made of powder coated stainless steel in black or white.

³ Weather shield is made of powder coated aluminium in black or white.

⁴ Pole is made of powder coated aluminium in black, white or wooden design.








HEATSCOPE SPOT

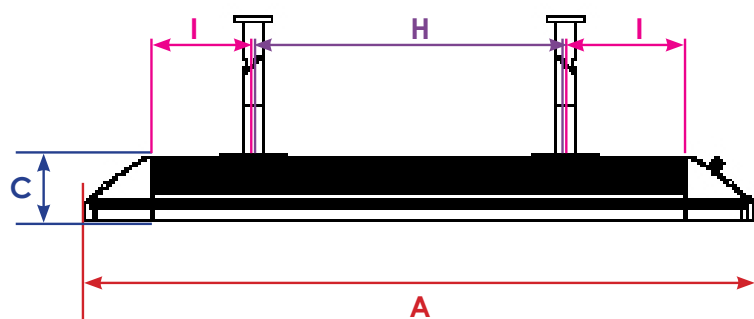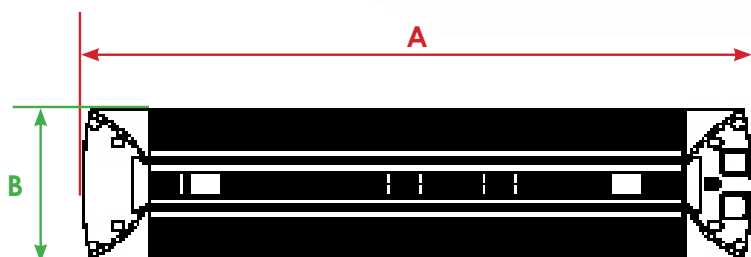

	A	B	C	D	E	F	G	H	I
MHS-SM1600 MHS-SP1600	670 mm	184 mm	82 mm	9 mm	100 mm	60 mm	11 mm	≤ 240 mm	≥ 135 mm
MHS-SM2200 MHS-SP2200	810 mm							≤ 300 mm	≥ 175 mm
MHS-SM2800 MHS-SP2800	890 mm							≤ 370 mm	≥ 175 mm

HEATSCOPE VISION

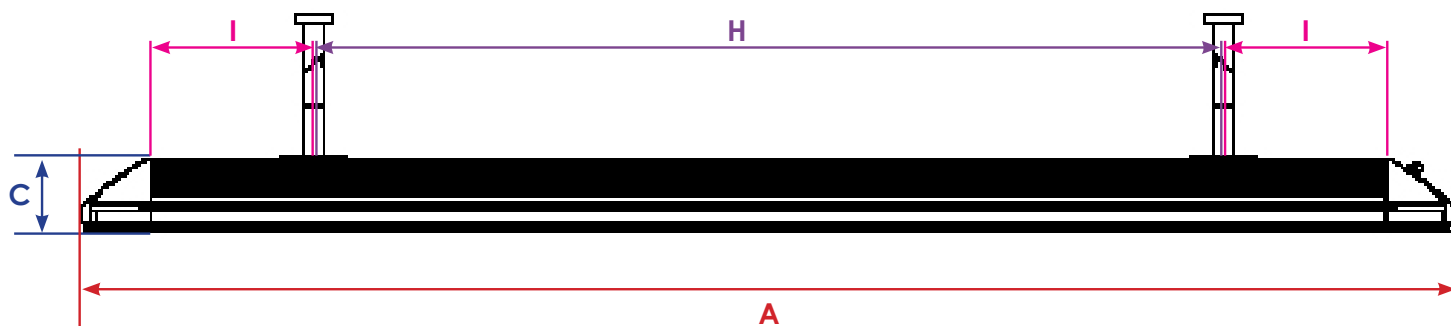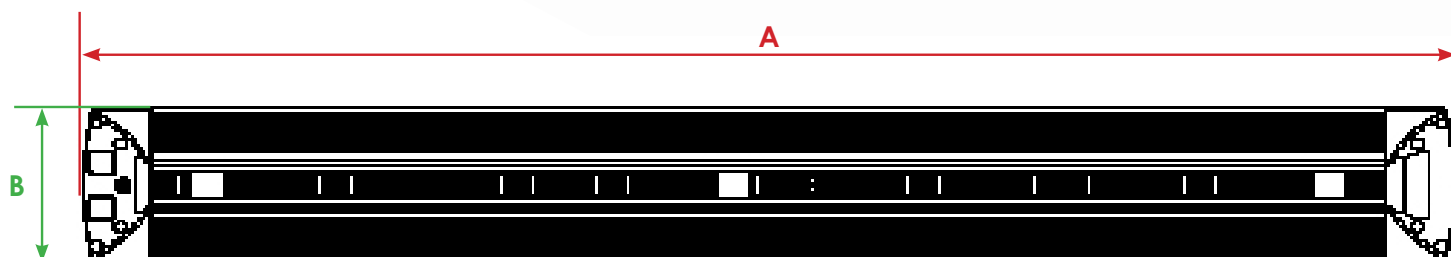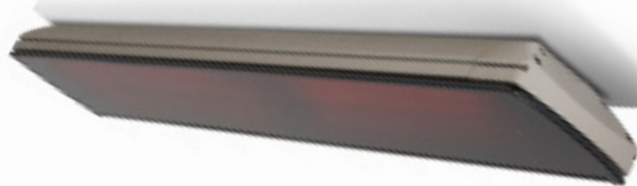

	A	B	C	D	E	F	G	H	I
MHS-VE1600 MHS-VT1600	810 mm	184 mm	90 mm	9 mm	100 mm	60 mm	11 mm	≤ 300 mm	≥ 175 mm
MHS-VE2200 MHS-VT2200	1160 mm							≤ 650 mm	≥ 175 mm
MHS-VE3200 MHS-VT3200	1660 mm							≤ 1150 mm	≥ 175 mm